


REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
0		RELEASED	04/26/02
			CC

H3605XXX	"L" (length)	Cut/Strip Length
076	3"	084mm
152	6"	160mm
229/230	9"	237mm
240	9.5"	248mm
305	12"	313mm
457/460	18"	465mm
610	24"	618mm

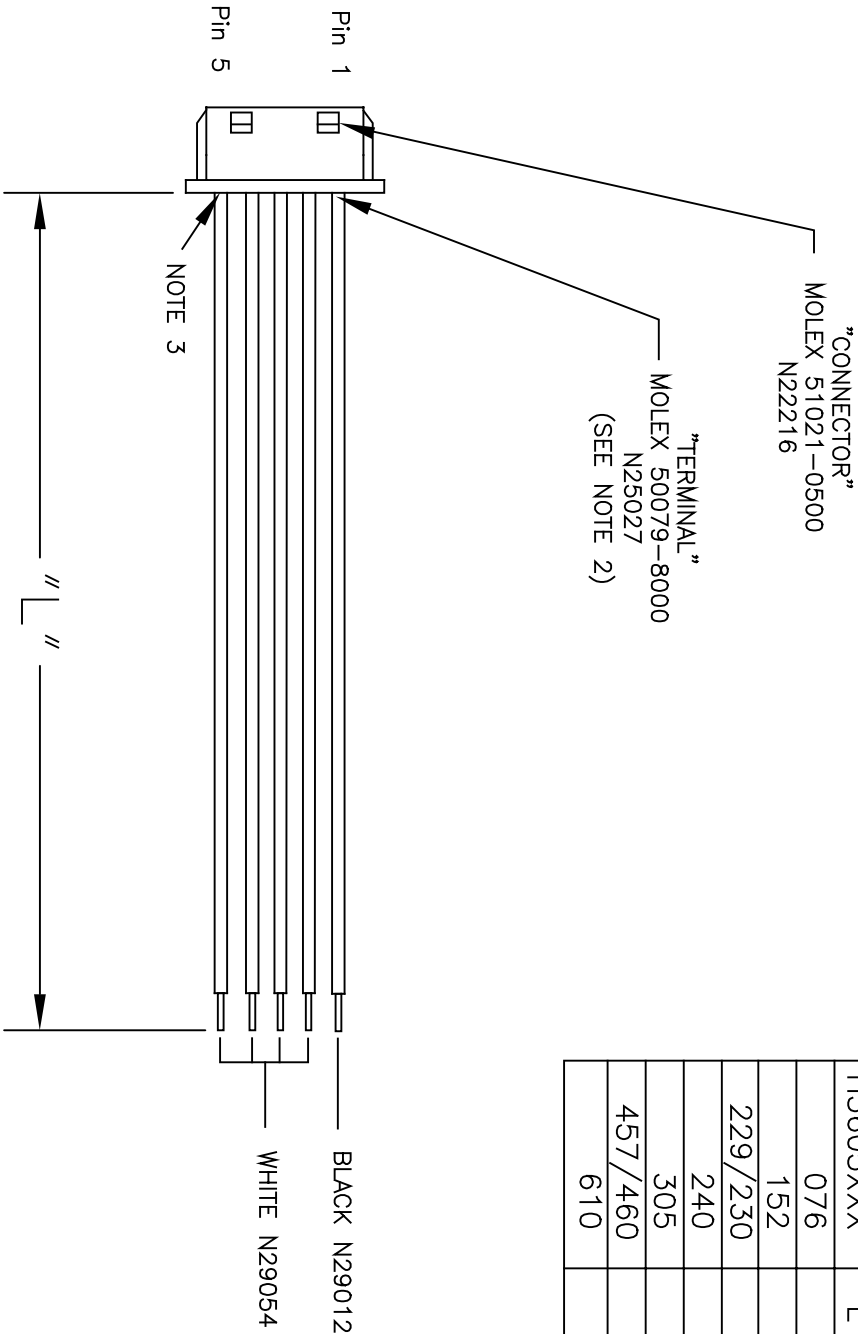

- NOTES:
1. ALL WIRING MUST HAVE A FLAMIBILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER.
 2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, SEE ATTACHED DRAWINGS FOR ACCEPTABILITY.
 3. CONNECTOR N22216 WIRE STRIP LENGTH IS 1.65 ± .25mm.
 4. WIRES TO BE 26 AWG, MIL STD W16878 TYPE B (BELDEN #8504 OR EQUIVELANT) IN COLORS LISTED.
 5. USE CABLE TIE N22211 FOR EACH HARNESS. ATTACH TIE AND CLIP EXCESS FLUSH LEAVING NO SHARP EDGE.

		APPROVALS		DATE	
		DRAWN	CC	04/26/02	
MATERIAL		CHECKED	CC	04/26/02	ENDICOTT RESEARCH GROUP, INC. 2601 WAYNE ST., ENDICOTT, NY 13760 807-754-9187 WIRING HARNESS H3605
FINISH		APPROVED	CC	04/26/02	
DO NOT SCALE		SCALE		SHEET	1 OF 1